



### 1X2

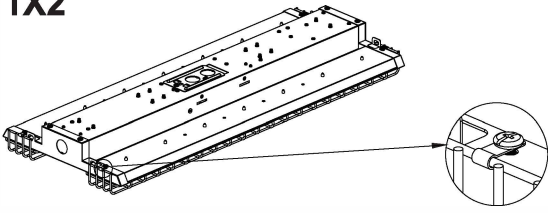

#### ACCESSORY LIST

Mounting Type	Accessory	Specifications	Quantity
	Wire Guard	MLH04NET-L611W70.5H36(W)	2
	Mount Bracket	FD55HD-L15W6T0.5	4

### 2X2

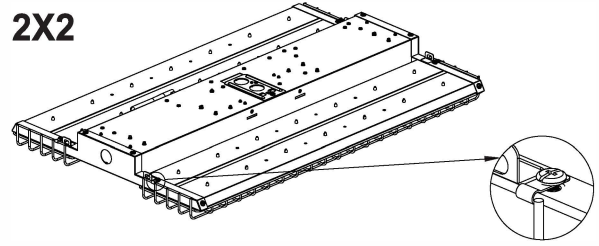


#### ACCESSORY LIST




Mounting Type	Accessory	Specifications	Quantity
	Wire Guard	MLH04NET-L611W128.5H36(W)	2
	Mount Bracket	FD55HD-L15W6T0.5	4

Note: Screws 1x2 and 2x2 fixtures shared need to be removed from the fixture before the wire guard installation.
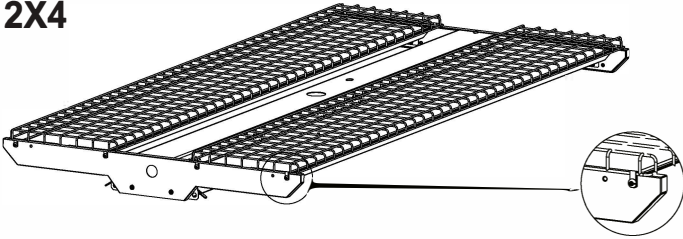
### 2X4



#### ACCESSORY LIST

Mounting Type	Accessory	Specifications	Quantity
	Wire Guard	HBL24net-LD17W 218H 20D2.5(W)	2
	Mount Bracket	FD55HD-L15W6T0.5	8
	Bolt	BM4x6, Scren	8

1. Lay the fixture on flat and clean surface with lens side upward.
2. Put wire guard upon the frame , fix it with m4\*6 screws provided on side.
3. There are 2 and 4 strips configurations, please refer to the above drawing.